
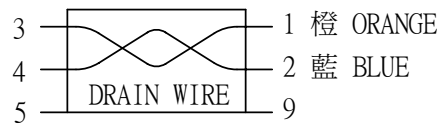


PIN ASSIGNMENT

A (IEEE 1394b 9M) B (IEEE 1394b 9M)

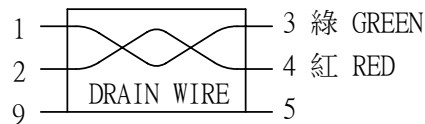

6 黑 BLACK
8 白 WHITE
SHELL

NOTE:
LENGTH P/N
L=4500±80 1641
L=7700±140 1645
L=10000±200 1646

ITEM	DESCRIPTIONS	Q'TY
⑤	IEEE 1394b CABLE,UL20276 25AWG*2 TWISTED PAIRS+22AWG*2 CONDUCTORS,DOUBLE SHIELDED,PVC JACKET,COLOR:GRAY	1
④	ASSEMBLY FERRITE CORE,COLOR:BLACK	2
③	METAL THUMB SCREW M3.0,NICKEL PLATED	4
②	PVC MOLDING HOUSING,COLOR:BLACK	2
①	IEEE 1394b BETA CONNECTOR,9 PIN,INSULATOR COLOR:BLACK	2

unibrain®			
IEEE 1394b CABLE BETA/BETA	P/N	F301111B06-****805	
	DWG	F301111B06	REV 1.3
CUSTOMER P/N		UB	
CUSTOMER P/N		SEE NOTE	
		TOLERANCES: .X=±0.25 XX=±0.05	
		SCALE: 1/1	UNIT: mm
		APPROVED	DATE
		C.P.LIU	22-JAN-10